


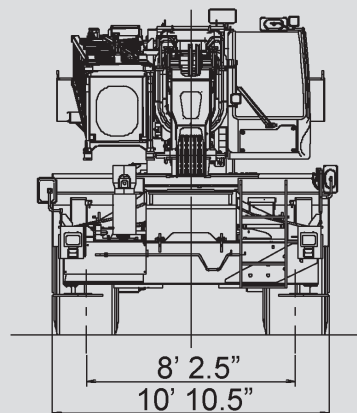
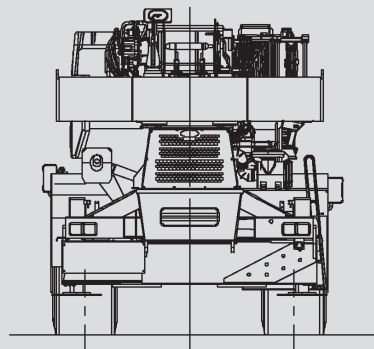


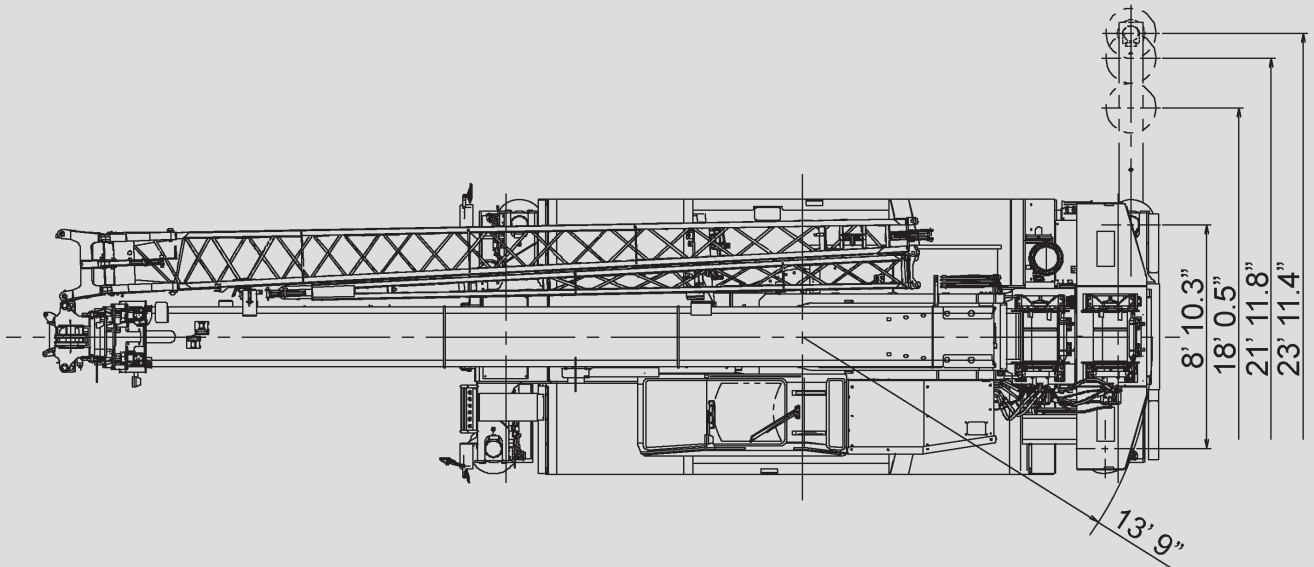

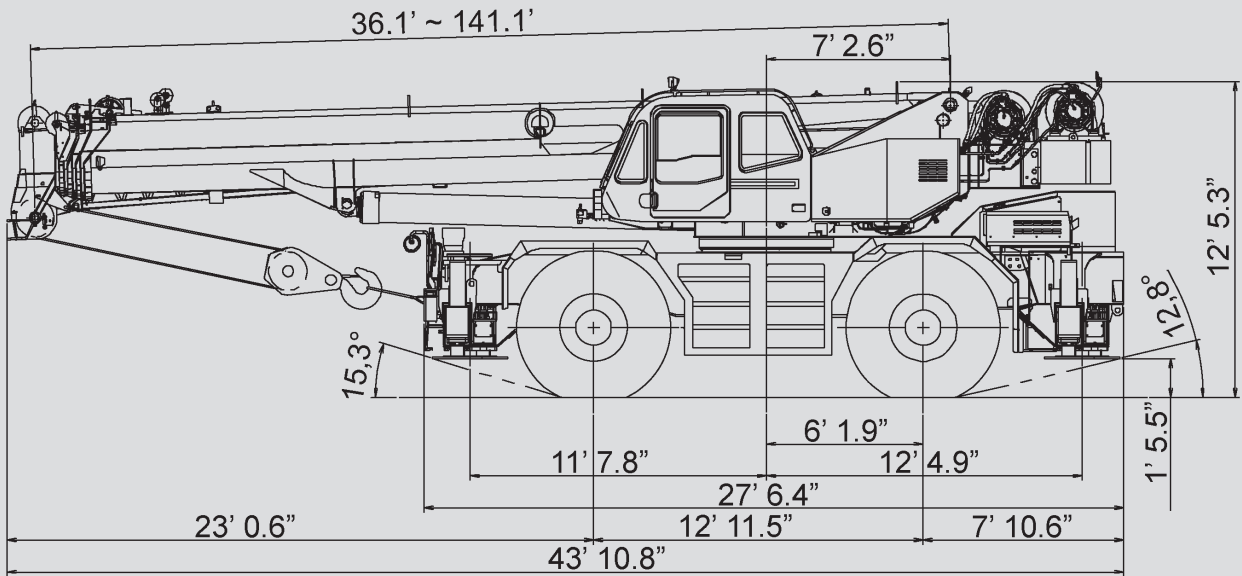

75 t Rough Terrain Crane

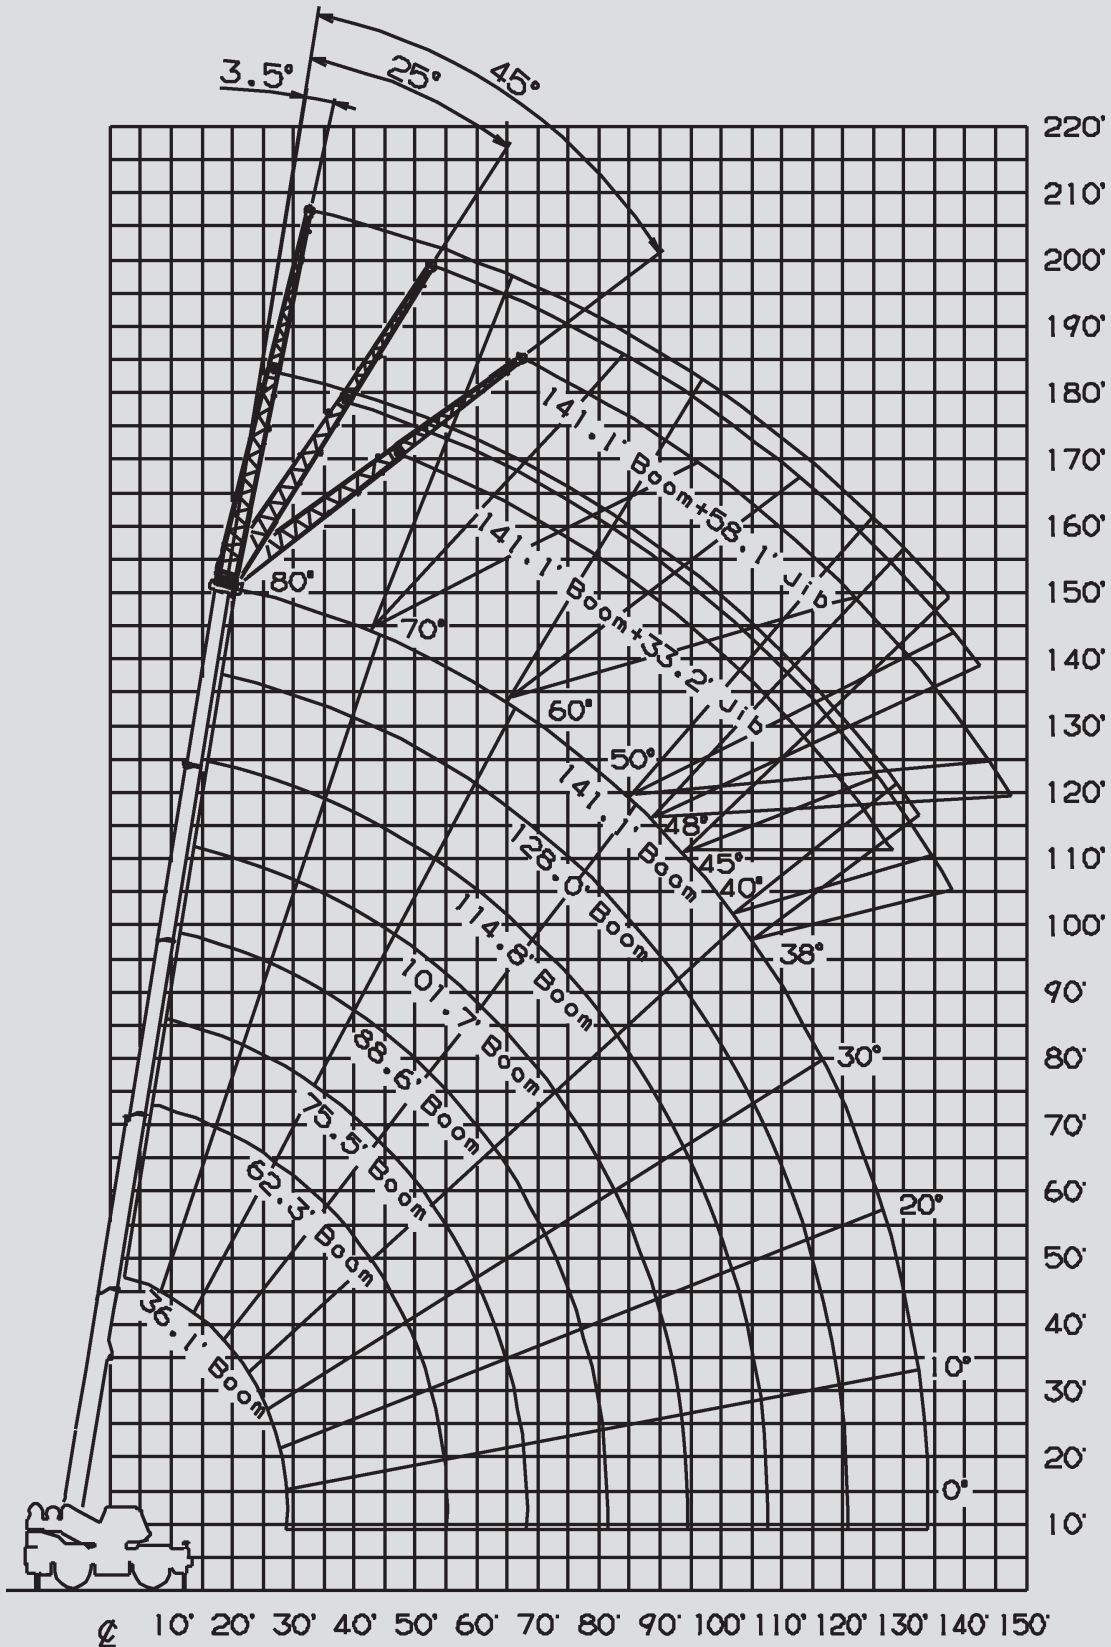

Working range



   										
36.1-141.1 ft		12,500 lbs			24'7"x23'11.4"			360°		
100%										
ft	36.1	49.2	62.3	75.5	88.6	101.7	114.8	128	141.1	ft
8	150	90								8
10	132.3	90	70.5							10
12	117.1	90	70.5	44.1						12
15	98	90	70.5	44.1	44.1					15
20	75.6	75.1	69.6	44.1	42.4	36.6				20
25	60	59.4	59.1	44.1	39.1	32.4	28.5	22		25
30		45.9	45	44.1	38.8	31.5	26.3	22	19.8	30
35		33.9	38.3	34.6	34.7	30.6	25.6	20.3	18.5	35
40		26.1	30.2	28.5	27.7	27.7	24.9	18.7	17.2	40
45			24.6	24.8	22.2	22.8	22.7	17.7	16.9	45
50			20.5	20.7	19	18.7	19.1	17.1	16.5	50
55			14	17.5	17.4	15.5	16	15.6	16.1	55
60				15	15.2	14	13.4	14.2	13.9	60
65				13	13.2	12.8	11.6	12.5	11.9	65
70					11.5	11.6	10.6	10.9	10.3	70
75					10.1	10.3	9.7	9.5	8.8	75
80					9	9.1	9	8.3	7.7	80
85						8	8.1	7.2	6.6	85
90						7.2	7.2	6.3	5.7	90
95							6.4	5.6	4.9	95
100							5.8	4.9	4.3	100
105							5.2	4.3	3.7	105
110								3.8	3.1	110
115								3.3	2.6	115
120								2.9	2.2	120
125									1.8	125
130									1.5	130
Lifting capacities at zero degree boom angle:										
0°	26	16.8	13.7	10.1	8.4	6.6	4.6	2.9	1.1	0°

Carry Decks
Boom Trucks
Rough Terrain Cranes
All Terrain Cranes
Truck Cranes
Crawler Cranes
Access Platforms
Fork Lifts






Call us (888) 972-7263



75 t | Rough Terrain Crane

114.8 ft	33.2/58.1 ft	12,500 lbs	24'7"x23'11.4" 100%	360°

°	ft	33.2 3.5°	ft	33.2 25°	ft	33.2 45°	ft	58,1 3.5°	ft	58,1 25°	ft	58,1 45°	°
80°	28.2	12.3	40.4	11.3	47.6	8.7	35.1	7.1	56.8	6.2	68.9	4.5	80°
79°	30.8	12.3	42.7	10.4	49.5	8.3	38.4	7.1	59.4	5.6	71.2	4.2	79°
78°	33.8	12.3	45.6	10.4	52.2	8.3	41.7	7.1	62.7	5.6	73.8	4.2	78°
77°	36.7	12.3	48.2	10.4	54.8	8.2	44.9	7.1	65.6	5.6	76.8	4.2	77°
76°	39.7	12.3	50.5	10.1	56.8	8	48.2	7.1	68.6	5.5	79.1	4.2	76°
75°	42.3	12.3	53.1	9.9	59.1	7.8	51.2	7.1	71.2	5.4	81.7	4.1	75°
73°	47.6	12.3	58.1	9.3	63.6	7.6	57.7	7.1	76.8	5	86.3	4	73°
70°	55.1	11.4	65.0	8.6	70.2	7.2	67.3	7.1	84.6	4.7	93.2	3.8	70°
68°	60.0	10.8	69.6	8.2	74.1	6.9	72.8	6.8	89.9	4.5	97.8	3.6	68°
65°	67.3	10.1	76.1	7.7	80.4	6.6	81.0	6.1	97.8	4.2	104.0	3.5	65°
63°	71.9	9.6	80.4	7.3	84.3	6.4	86.0	5.7	102.0	4	108.3	3.4	63°
60°	78.4	9	86.6	6.9	89.9	6.2	93.5	5.2	108.9	3.8	114.2	3.3	60°
58°	82.3	8.3	90.6	6.7	93.5	6	98.4	4.9	113.5	3.6	117.8	3.2	58°
55°	88.3	7	95.8	6.2	98.8	5.8	106.0	4.5	119.8	3.4	123.0	3.1	55°
53°	92.2	6.3	99.4	5.6	101.7	5.3	110.2	4.3	123.7	3.4	126.3	3.1	53°
50°	97.4	5.3	104.7	4.8	106.3	4.6	116.5	3.6	129.3	3.1	130.9	2.8	50°
48°	101.0	4.8	107.6	4.3	108.9	4.2	120.4	3.2	132.5	2.7	133.5	2.5	48°
45°	106.0	4.1	112.2	3.7	113.2	3.6	126.3	2.7	137.5	2.3	137.5	2.1	45°
43°	109.3	3.7	114.8	3.4			129.9	2.3	140.4	2			43°
40°	113.8	3.2	119.1	3			135.2	1.9	144.7	1.7			40°
38°	116.8	2.9	121.4	2.7			138.5	1.7	147.0	1.5			38°
35°	121.1	2.5	125.0	2.3			142.7	1.4	150.6	1.2			35°
33°	123.4	2.3	127.0	2.1			145.7	1.2	152.9	1.1			33°
30°	127.0	2	129.9	1.9			149.6	1					30°
25°	132.2	1.6	133.9	1.5									25°
20°	136.2	1.3											20°
15°	139.1	1.1											15°

    													
128 ft		33.2/58.1 ft				12,500 lbs		24'7"x23'11.4"				360°	
100%													
°	ft	33.2 3.5°	ft	33.2 25°	ft	33.2 45°	ft	58.1 3.5°	ft	58.1 25°	ft	58.1 45°	°
80°	30.8	10.1	44.0	9.5	51.5	7.7	38.7	6.2	60.7	5.5	72.5	4.1	80°
79°	34.1	10.1	46.9	9.2	54.1	7.5	42.7	6.2	64.0	5.3	75.1	3.9	79°
78°	37.4	10.1	49.5	8.9	56.8	7.3	45.9	6.2	67.3	5.1	78.1	3.9	78°
77°	40.4	10.1	52.5	8.6	59.4	7.2	49.9	6.2	70.2	4.9	80.7	3.8	77°
76°	43.3	10.1	55.1	8.4	61.7	7	53.5	6.2	73.5	4.8	83.3	3.7	76°
75°	46.6	10.1	58.1	8.2	64.0	6.8	56.8	6.2	76.1	4.6	86.0	3.6	75°
73°	52.5	10	63.3	7.7	68.9	6.5	64.3	6.2	82.3	4.3	91.2	3.4	73°
70°	60.7	9.1	70.9	7.1	76.4	6.1	74.1	6	91.2	3.9	98.8	3.2	70°
68°	65.9	8.6	76.1	6.8	80.7	5.8	80.1	5.5	96.5	3.7	103.7	3.1	68°
65°	73.8	7.9	83.3	6.3	87.3	5.5	88.6	4.9	104.7	3.4	110.6	2.9	65°
63°	78.7	7.6	87.9	6	91.5	5.3	94.2	4.6	109.6	3.3	115.8	2.8	63°
60°	86.3	6.7	94.5	5.6	97.8	5	102.7	4.1	117.1	3	122.7	2.7	60°
58°	90.6	6.2	99.1	5.4	101.7	4.9	107.6	3.9	122.4	2.9	127.3	2.6	58°
55°	97.1	5.5	105.3	4.9	107.6	4.7	115.5	3.5	129.3	2.8	133.5	2.5	55°
53°	101.4	5.1	108.9	4.7	110.9	4.5	120.4	3.4	133.9	2.6	137.5	2.4	53°
50°	107.6	4.7	114.8	4.3	116.1	4.1	127.3	3.1	140.4	2.5	143.0	2.4	50°
48°	111.5	4.3	118.1	3.9	119.1	3.8	131.6	2.8	144.4	2.4	146.3	2.3	48°
45°	116.8	3.7	123.0	3.4	123.4	3.3	137.5	2.4	149.3	2	149.9	1.9	45°
43°	120.4	3.3	126.0	3.1			141.4	2.1	152.6	1.8			43°
40°	125.0	2.9	130.2	2.7			147.0	1.7	156.8	1.5			40°
38°	128.3	2.6	132.9	2.4			150.3	1.5	159.4	1.3			38°
35°	132.5	2.3	136.5	2.1			155.2	1.2	162.7	1.1			35°
33°	135.5	2.1	138.8	1.9			158.1	1.1	165.0	0.9			33°
30°	139.1	1.8	142.1	1.7									30°
25°	144.4	1.5	146.3	1.4									25°
20°	148.6	1.2											20°
15°	151.6	1											15°

Carry Decks
 Boom Trucks
 Rough Terrain Cranes
 All Terrain Cranes
 Truck Cranes
 Crawler Cranes
 Access Platforms
 Fork Lifts

Call us (888) 972-7263



75 t | Rough Terrain Crane

141.1 ft	33.2/58.1 ft	12,500 lbs	24'7"x23'11.4" 100%	360°

°	ft	33.2 3.5°	ft	33.2 25°	ft	33.2 45°	ft	58.1 3.5°	ft	58.1 25°	ft	58.1 45°	°
80°	35.1	9.3	48.6	8.8	55.4	7.5	43.0	5.7	65.6	5.2	76.8	3.9	80°
79°	38.7	9.3	51.8	8.5	58.4	7.3	47.2	5.7	69.2	5	80.1	3.8	79°
78°	42.0	9.3	54.8	8.2	61.0	7.1	51.2	5.7	72.5	4.9	83.3	3.7	78°
77°	45.3	9.3	58.1	8	64.3	6.9	55.1	5.7	75.8	4.7	86.0	3.7	77°
76°	48.9	9.3	61.0	7.8	66.9	6.7	58.7	5.7	79.1	4.6	89.2	3.6	76°
75°	52.5	9.3	64.0	7.5	69.9	6.6	62.7	5.7	82.3	4.4	92.2	3.5	75°
73°	59.1	9.1	69.9	7.2	75.1	6.3	70.2	5.7	88.9	4.1	97.8	3.4	73°
70°	67.9	8.2	78.4	6.7	83.3	5.9	81.4	5.6	98.8	3.8	106.0	3.2	70°
68°	73.8	7.8	84.0	6.4	87.6	5.7	87.9	5.3	105.0	3.6	111.2	3	68°
65°	83.7	7.2	91.9	6	95.1	5.4	97.1	4.7	113.2	3.3	118.8	2.9	65°
63°	87.3	6.7	96.8	5.8	99.7	5.2	103.0	4.4	118.8	3.2	123.7	2.8	63°
60°	94.5	5.8	103.7	5.2	106.3	4.9	111.9	3.9	127.0	3	130.9	2.6	60°
58°	99.4	5.1	107.9	4.6	110.6	4.3	116.8	3.5	131.9	2.8	135.2	2.6	58°
55°	106.3	4.1	114.2	3.8	116.1	3.5	124.3	2.8	138.5	2.3	141.1	2.1	55°
53°	110.6	3.6	118.1	3.3	119.8	3.1	129.3	2.3	142.7	1.9	144.7	1.7	53°
50°	116.8	2.9	124.0	2.7	125.0	2.6	136.2	1.8	148.6	1.4	149.9	1.3	50°
48°	120.7	2.5	127.6	2.3	128.3	2.2	140.7	1.4	152.6	1.2	153.2	1.1	48°
45°	126.6	2	132.5	1.9	133.2	1.8	147.3	1					45°
43°	130.2	1.7	135.8	1.6									43°
40°	135.5	1.3	140.7	1.2									40°
38°	139.1	1.1	143.7	1									38°