



240 t All Terrain Crane

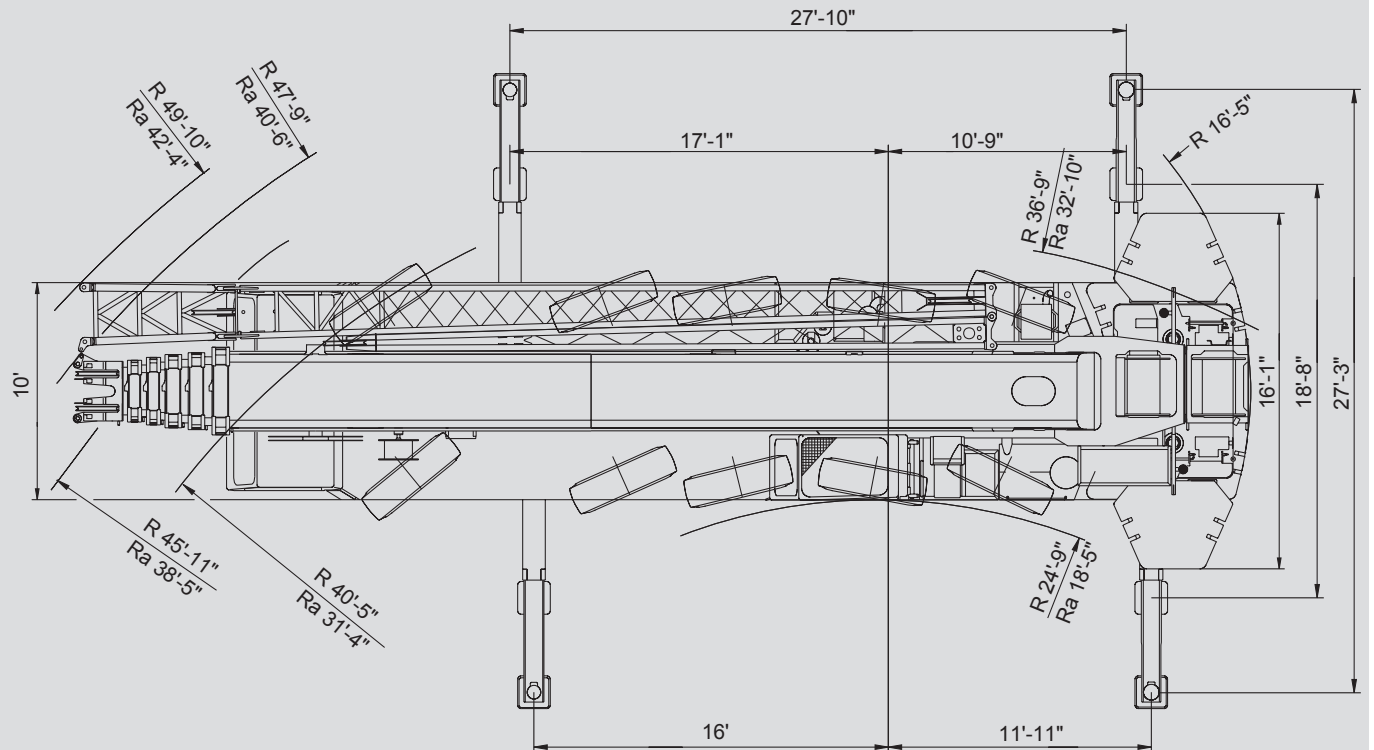


Call us (888) 972-7263

240 t | All Terrain Crane

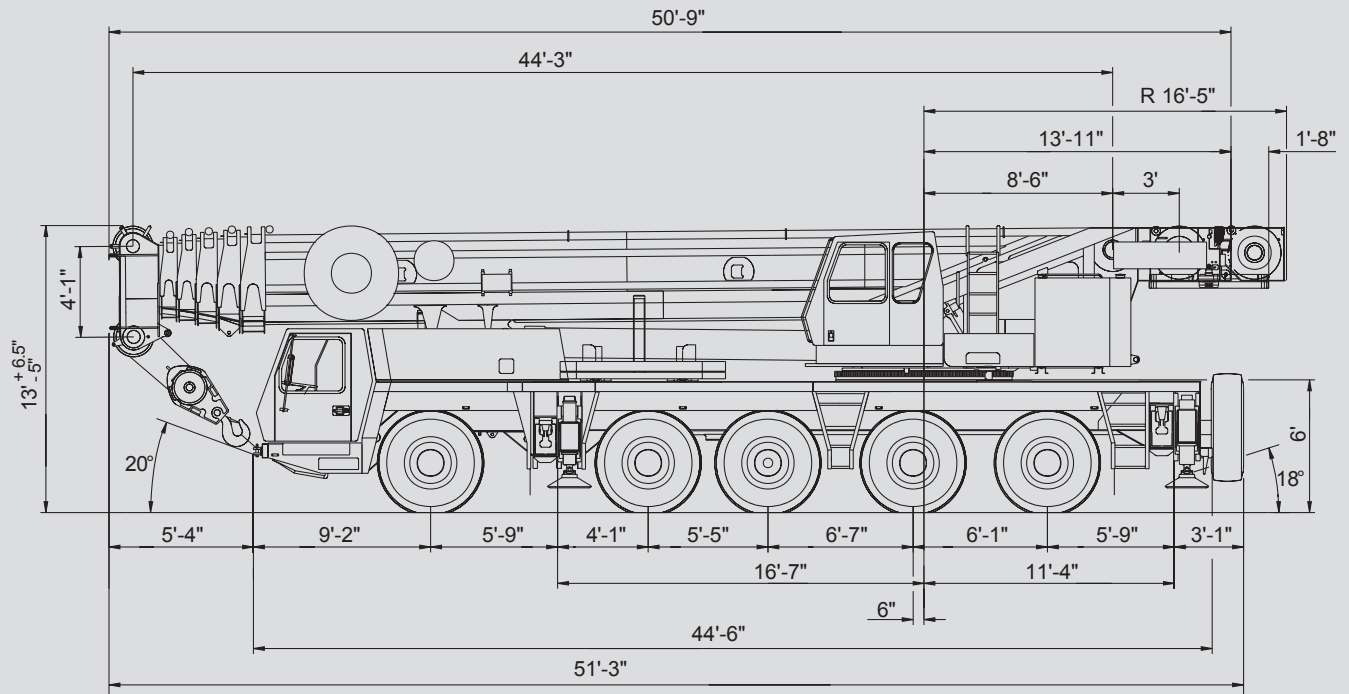

Working range

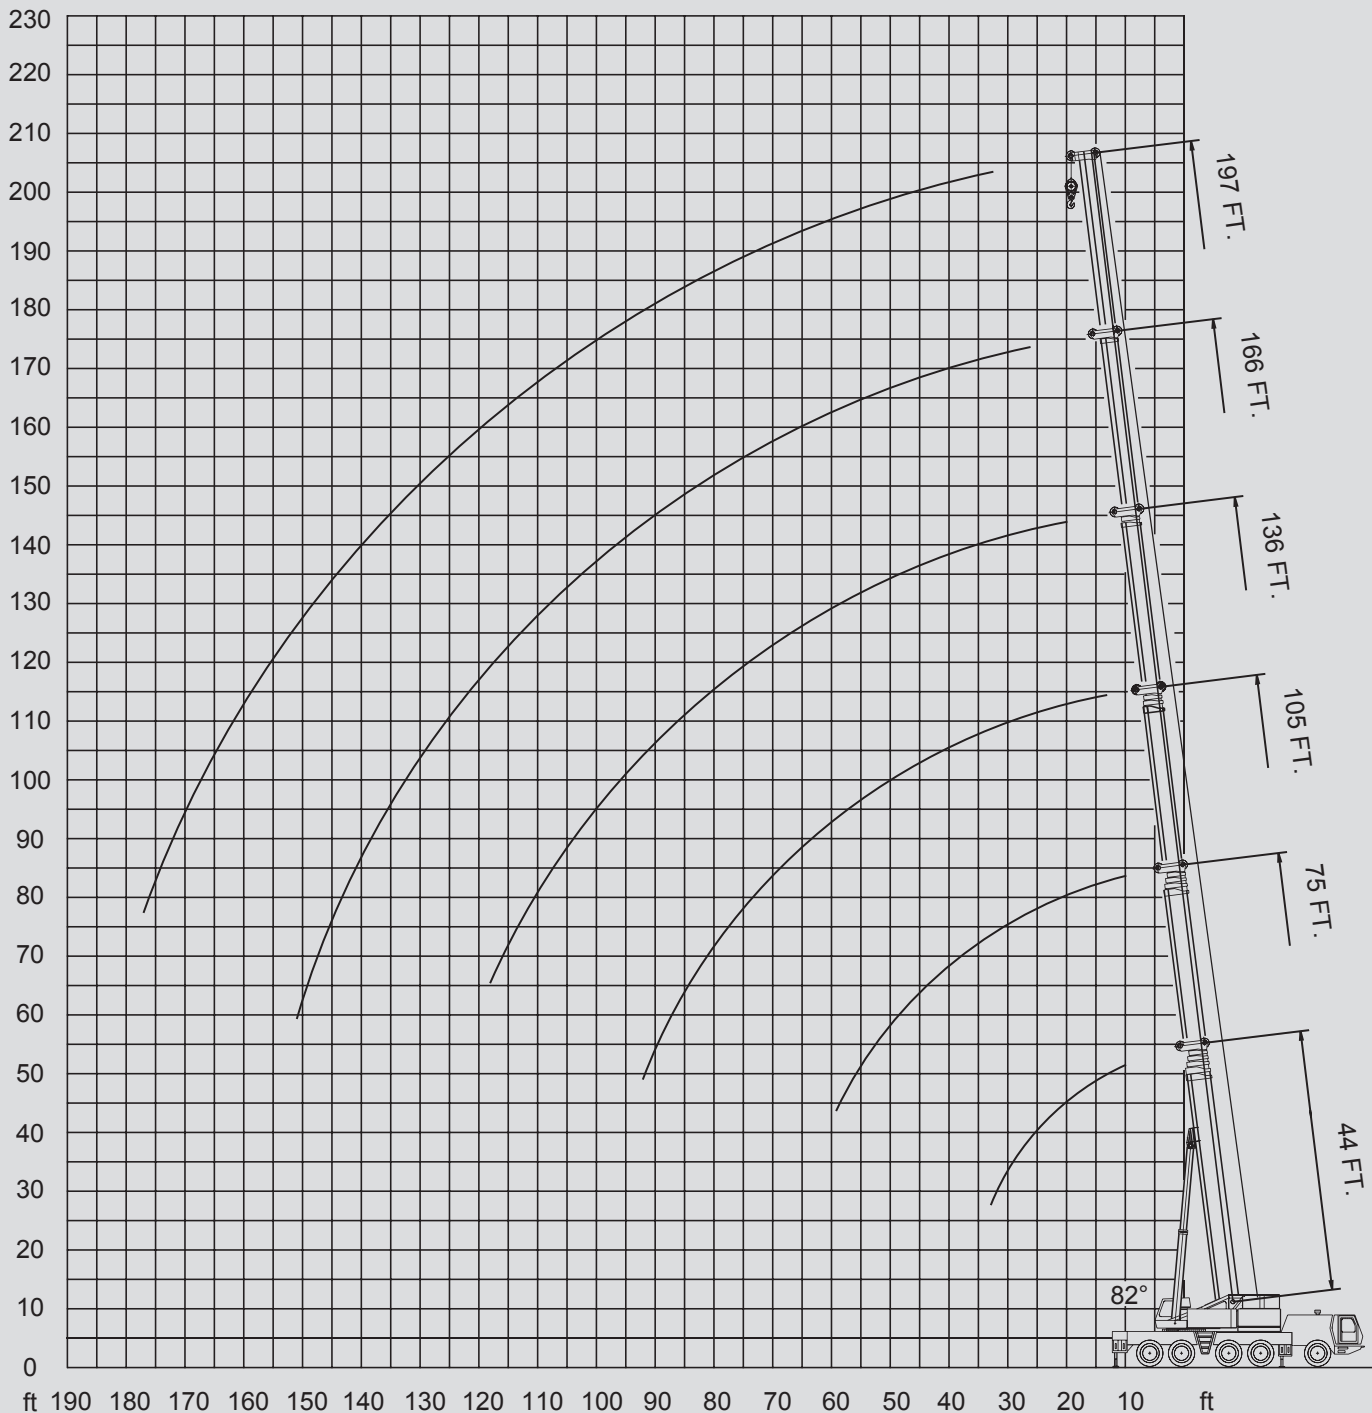

			
---	---	--	---

44-197 ft

154,300 lbs

27'11"x27'3"
100%

360°

ft	44*	44	60	75	90	105	121	136	151	166	182	197	ft
8	480												8
9	416												9
10	384	338	336	260	189								10
15	306	264	266	260	189	153							15
20	252	212	214	211	189	153	123	96					20
25	209	177	179	175	177	153	123	96	75				25
30	168	150	152	149	151	146	123	96	75	60	47		30
35			132	128	130	133	116	92	75	60	47	40	35
40			117	112	114	116	107	85	75	60	47	40	40
45			104	99	102	103	99	79	71	60	47	40	45
50				88	94	92	93	74	66	57	47	40	50
55				79	85	83	85	69	62	54	47	40	55
60					77	75	77	64	58	51	45	40	60
65					70	68	71	58	53	48	42.6	39	65
70					63	63	63	55	50	45	40.6	37.4	70
75					57	59	57	52	48	43.2	38.8	35.8	75
80						53	52	49	45	40.8	36.8	34.2	80
85						49	47	45	41.8	38.4	35	32.6	85
90						45	43	41.2	39	36.2	33	30.8	90
95							39.2	38.8	36.2	33.8	31	29.2	95
100							36	36.8	33.6	31.6	29.4	27.6	100
105								34.8	31.2	30	28	26.4	105
110								32.2	28.6	28.4	26.6	25.2	110
115								29.8	26.2	26.6	25.2	23.8	115
120									24.8	24.6	23.8	22.6	120
125									23.6	22.6	22.6	21.4	125
130									22.4	20.8	21.2	20	130
135									21.8	19.2	20.2	19.2	135
140										18.4	18.6	18.4	140
145										17.8	17.2	17.8	145
150										17.2	16	17	150
155											14.8	15.8	155
160											14	14.6	160
165												13.6	165
170												12.6	170
175												11.8	175
180												10.8	180

* over rear

Loads greater than 350,000 lbs can only be lifted with additional equipment

Carry Decks

Boom Trucks

Rough Terrain Cranes

All Terrain Cranes

Truck Cranes

Crawler Cranes

Access Platforms


Fork Lifts






Call us (888) 972-7263

240 t | All Terrain Crane

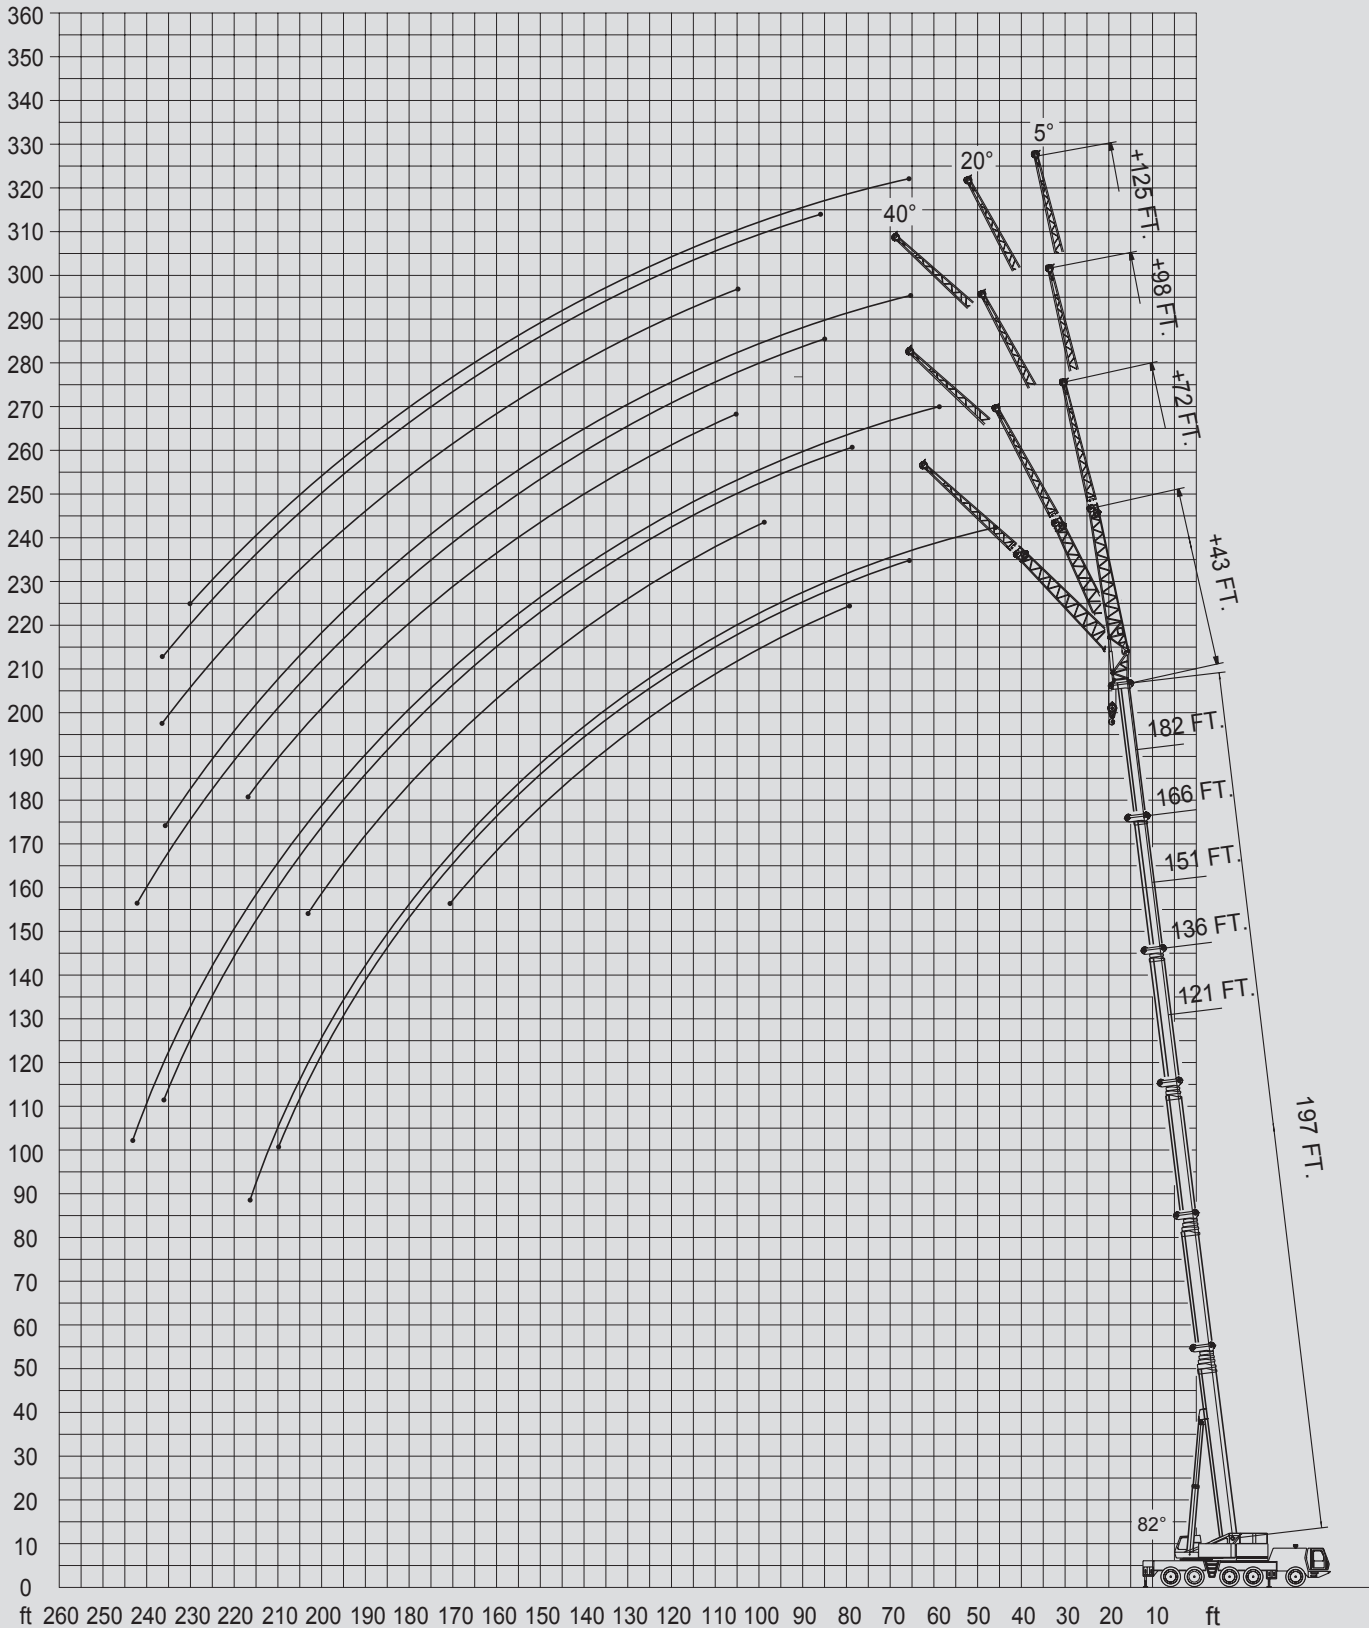

Working range



    												
197 ft		43/72 ft				154,300 lbs		27'11"x27'3"		360°		Carry Decks
100%												
ft	5°	20°	43 40°	5°-20°	20°-40°	5°	20°	72 40°	5°-20°	20°-40°	ft	Boom Trucks
40	20.6										40	
45	20.6										45	
50	20.6										50	
55	20.6	19.8		19		12.6					55	
60	20.6	19.8		19		12.6					60	
65	20.6	19.8		19		12.6					65	
70	20.6	19.8	19	18.8	17.4	12.4					70	Terrain Cranes
75	20.6	19.8	19	18.8	17.4	12.4	11.6		10.6		75	
80	20.6	19.8	19	18.8	17.4	12.4	11.6		10.4		80	
85	20.6	19.8	19	18.6	17.4	12.2	11.4		10.4		85	
90	20.6	19.8	19	18.6	17.4	12.2	11.4		10.4		90	
95	20.6	19.8	19	18.4	17.4	12	11.4	10.6	10.2	9.6	95	
100	20.6	19.8	18.8	18	17.2	12	11.2	10.6	10.2	9.6	100	
105	20	19.4	18.6	17.6	16.8	12	11.2	10.4	10.2	9.4	105	
110	19.4	18.8	18.2	17.2	16.4	11.8	11.2	10.4	10.2	9.4	110	
115	18.6	18.2	17.6	16.6	16	11.8	11	10.2	10	9.4	115	
120	17.8	17.6	17.2	16	15.8	11.6	11	10.2	10	9.2	120	All Terrain Cranes
125	17	17	16.8	15.4	15.4	11.6	11	10	10	9.2	125	
130	16.2	16.4	16.4	15	15	11.6	11	10	10	9	130	
135	15.6	15.8	15.8	14.4	14.4	11.4	10.8	9.8	9.8	9	135	
140	15	15.2	15.2	13.8	13.8	11.4	10.8	9.8	9.8	9	140	
145	14.2	14.6	14.6	13.2	13.4	11.4	10.8	9.8	9.8	8.8	145	
150	13.6	13.8	14	12.6	12.8	11.2	10.6	9.8	9.6	8.8	150	
155	13	13.2	13.6	12	12.2	11.2	10.6	9.6	9.6	8.8	155	
160	12.4	12.6	13	11.4	11.8	11.2	10.4	9.6	9.4	8.8	160	
165	11.8	12	12.4	11	11.2	11	10.2	9.6	9.2	8.8	165	
170	11.4	11.6	11.8	10.4	10.8	10.6	10	9.6	9	8.6	170	Crawler Cranes
175	10.8	11		10		10.2	9.8	9.4	8.8	8.6	175	
180	10.4	10.6		9.6		9.8	9.6	9.4	8.6	8.6	180	
185	10	10.2		9		9.4	9.2	9.4	8.4	8.6	185	
190	9.2	9.4		8.4		8.8	9	9.4	8.2	8.4	190	
195	8.4	8.6		7.6		8.4	8.8	9.2	8	8.4	195	
200	7.6	8		7		8.2	8.4	9	7.8	8.2	200	
205	7	7.2		6.4		7.8	8.2		7.4		205	
210	6.4					7.4	7.8		7		210	
215	5.8					7.2	7.4		6.4		215	
220						6.6	7		6		220	Fork Lifts
225						6	6.4		5.4		225	
230						5.4	5		5		230	
235						4.8	5.8		4.4		235	
240						4.4	5.2				240	
245						3.8					245	

Call us (888) 972-7263

240 t | All Terrain Crane



197 ft	98/125 ft	154,300 lbs	27'11"x27'3" 100%	360°

ft	98					125					ft
	5°	20°	40°	5°-20°	20°-40°	5°	20°	40°	5°-20°	20°-40°	
60	9.8					6.8					60
65	9.8					6.8					65
70	9.8					6.8					70
75	9.8					6.8					75
80	9.8					6.8					80
85	9.8					6.8					85
90	9.8	10.2		9.2		6.8	7.2		6.6		90
95	9.8	10		9		6.8	7.2		6.4		95
100	9.8	9.8	8.2	9	7.6	6.8	7		6.4		100
105	9.8	9.8	8.2	8.8	7.6	6.8	7	6.6	6.2	6	105
110	9.8	9.6	8.2	8.6	7.6	6.8	6.8	6.6	6.2	6	110
115	9.8	9.4	8.2	8.6	7.6	6.8	6.6	6.6	6	6	115
120	9.8	9.2	8.2	8.4	7.6	6.8	6.6	6.4	6	5.8	120
125	9.6	9	8.2	8.2	7.6	6.8	6.4	6.4	5.8	5.8	125
130	9.6	8.8	8.2	8	7.6	6.6	6.4	6.2	5.8	5.6	130
135	9.4	8.6	8.2	7.8	7.4	6.4	6.2	6.2	5.6	5.6	135
140	9.2	8.6	8	7.8	7.4	6.4	6.2	6	5.6	5.4	140
145	9	8.4	8	7.6	7.2	6.2	6	6	5.4	5.4	145
150	8.8	8.2	7.8	7.4	7.2	6.2	5.8	5.8	5.4	5.4	150
155	8.6	8	7.8	7.4	7	6	5.8	5.8	5.2	5.2	155
160	8.4	8	7.6	7.2	7	5.8	5.6	5.6	5.2	5.2	160
165	8.2	7.8	7.4	7	6.8	5.8	5.6	5.6	5	5	165
170	8	7.6	7.4	7	6.8	5.6	5.4	5.4	5	5	170
175	7.8	7.4	7.4	6.8	6.6	5.6	5.4	5.2	4.8	4.8	175
180	7.8	7.4	7.2	6.6	6.6	5.4	5.2	5.2	4.8	4.8	180
185	7.6	7.2	7.2	6.6	6.4	5.4	5.2	5	4.6	4.6	185
190	7.4	7.2	7	6.4	6.4	5.2	5	5	4.6	4.6	190
195	7.2	7	7	6.4	6.4	5	4.8	4.8	4.4	4.4	195
200	7	6.8	6.8	6.2	6.2	5	4.8	4.8	4.4	4.4	200
205	6.6	6.6	6.6	6	6	4.8	4.6	4.8	4.2	4.2	205
210	6.4	6.4	6.6	5.8	6	4.8	4.6	4.6	4.2	4.2	210
215	6.2	6.2	6.4	5.6	5.8	4.6	4.4	4.6	4	4.2	215
220	5.8	6		5.4		4.4	4.4	4.4	4	4	220
225	5.6	5.8		5.2		4.4	4.2	4.4	4	4	225
230	5.4	5.6		5		4.2	4.2	4.2	3.8	3.8	230
235	5	5.4		4.6		4	4	4.2	3.6	3.8	235
240	4.4	5		4		3.8	3.8		3.6		240
245	4	4.4		3.6		3.6	3.8		3.4		245
250	3.6	3.8		3.2		3.4	3.6		3.2		250
255	3	3.4		2.8		3	3.4		2.8		255
260		3		2.4			3		2.4		260

